

STYLED IN ITALY. PROUDLY AMERICAN.

# PLASTER



**atlas concorde**  
USA



NEW 2017

PLASTER

PLASTER

Plaster Ash 12<sup>3/8</sup>"x22<sup>1/2</sup>" - 31.5x57 cm  
Plaster Ash Brick Wall Mosaic 12"x12" - 30.5x30.5 cm

WHITE BODY WALL TILE



Pure



Warm



Ash

## Urban and contemporary style

Typical of industrial areas, the plaster wall enhances environments that want to display a contemporary, urban style. This collection also features a tumbled Brick Mosaic and a Scrape effect decor that echoes the style of the stripped walls. The worn and cracked effects are easily paired with any of our distressed collections.

- Cement look
- 3D texture
- Versatile pairing
- Unique Scrape decorative tile
- Wall range for residential and commercial spaces



# PLASTER


WHITE BODY WALL TILE

SHADE VARIATION

NEW 2017




Pure

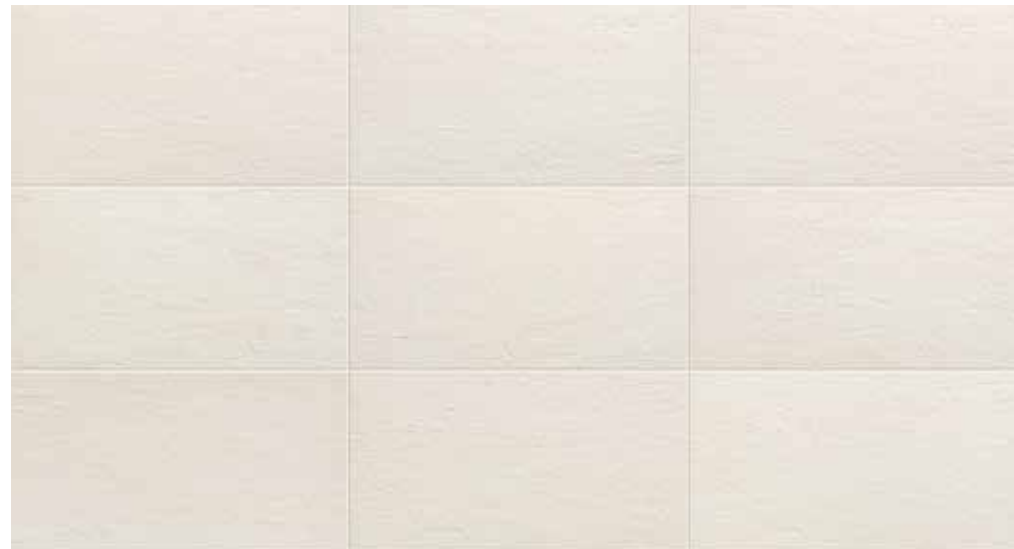

Warm



Ash

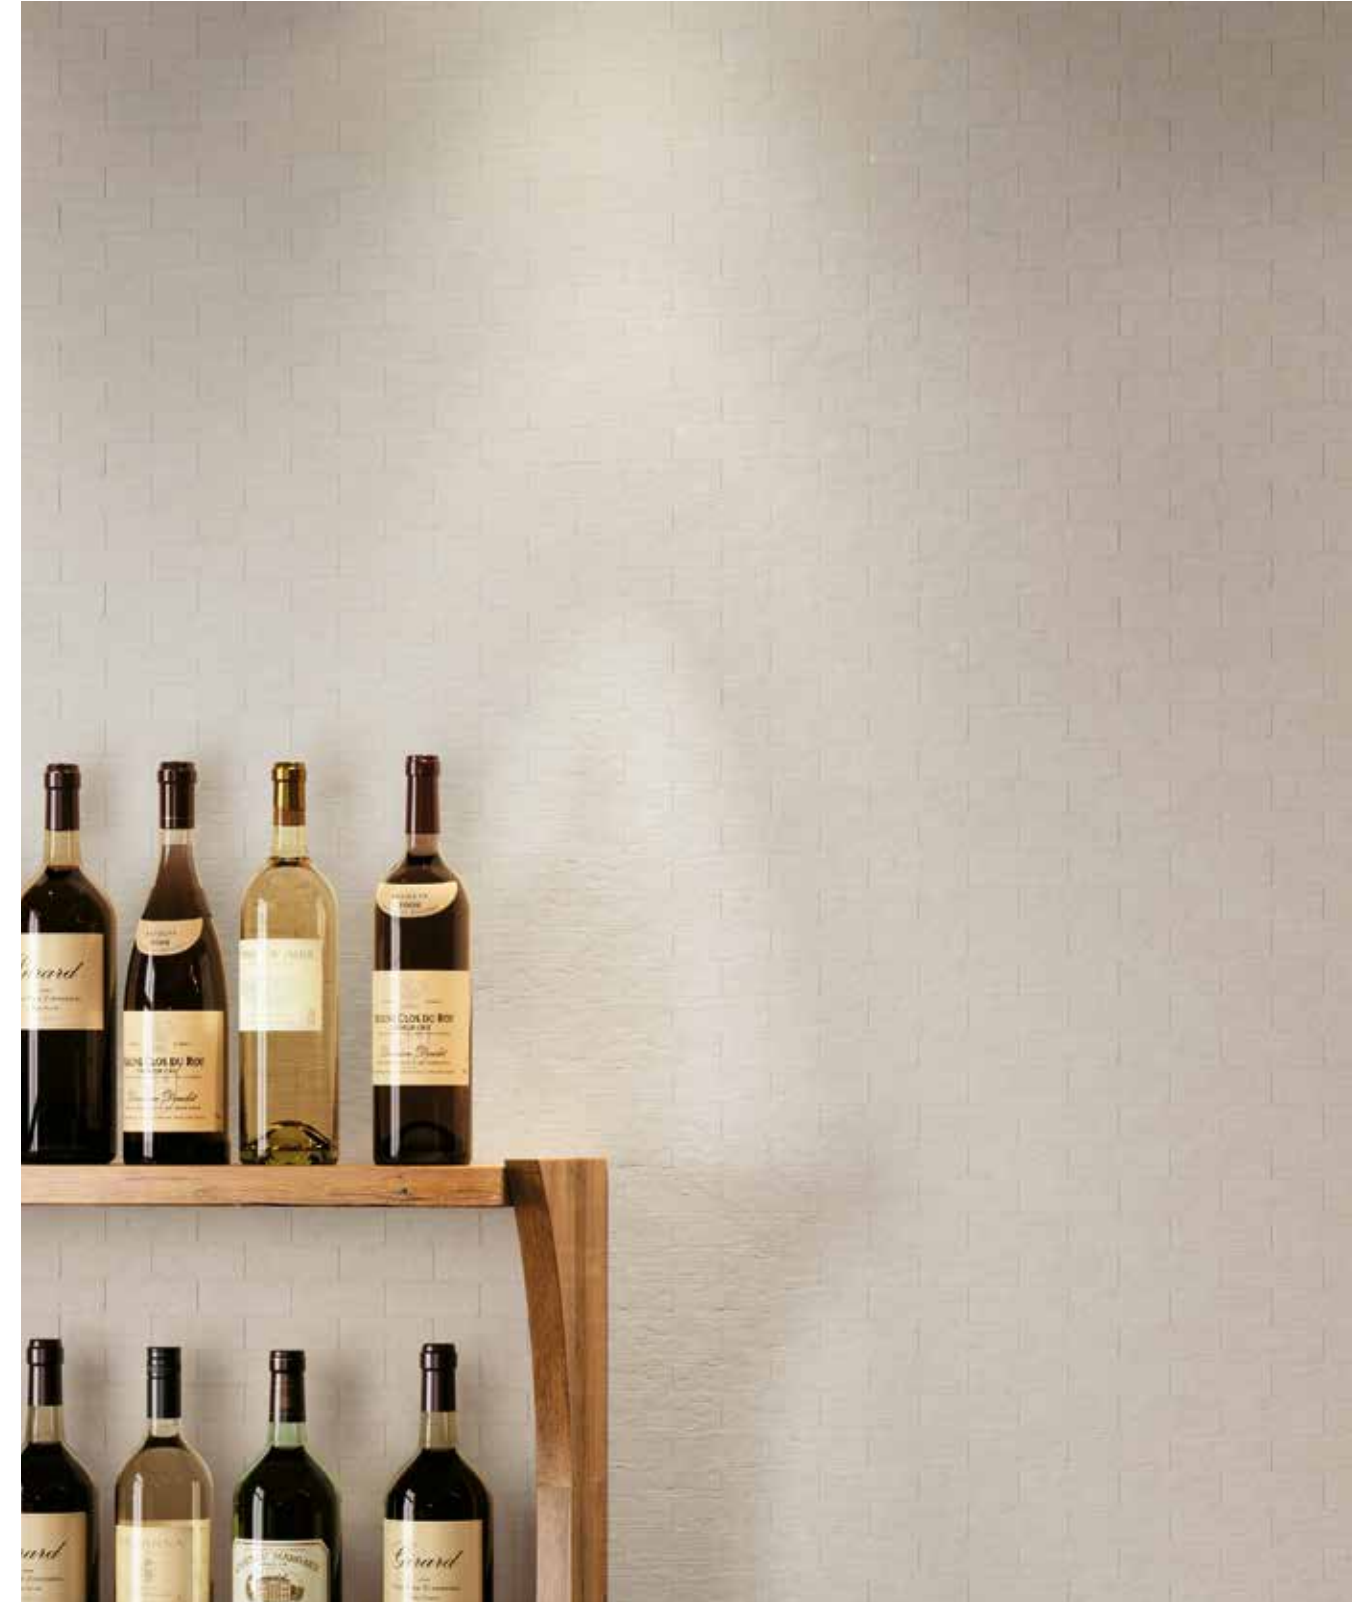

## PLASTER

Plaster Warm Brick Wall Mosaic 12"x12" - 30.5x30.5 cm

# PLASTER

WHITE BODY WALL TILE

 **V1** UNIFORM APPEARANCE

Compliant with standards ANSI A137.1-2012



NEW 2017

## PLASTER

Plaster Brass Scrape 12<sup>3/8</sup>"x22<sup>1/2</sup>" - 31.5x57 cm  
Plaster Ash Brick Wall Mosaic 12"x12" - 30.5x30.5 cm


## JUTE

Jute Tan Burlap 11<sup>3/4</sup>"x23<sup>5/8</sup>" - 30x60 cm  
Jute Tan Burlap Cove Base 6"x12" - 15x30 cm



## PLASTER

Plaster Ash 12<sup>3/8</sup>"x22<sup>1/2</sup>" - 31.5x57 cm

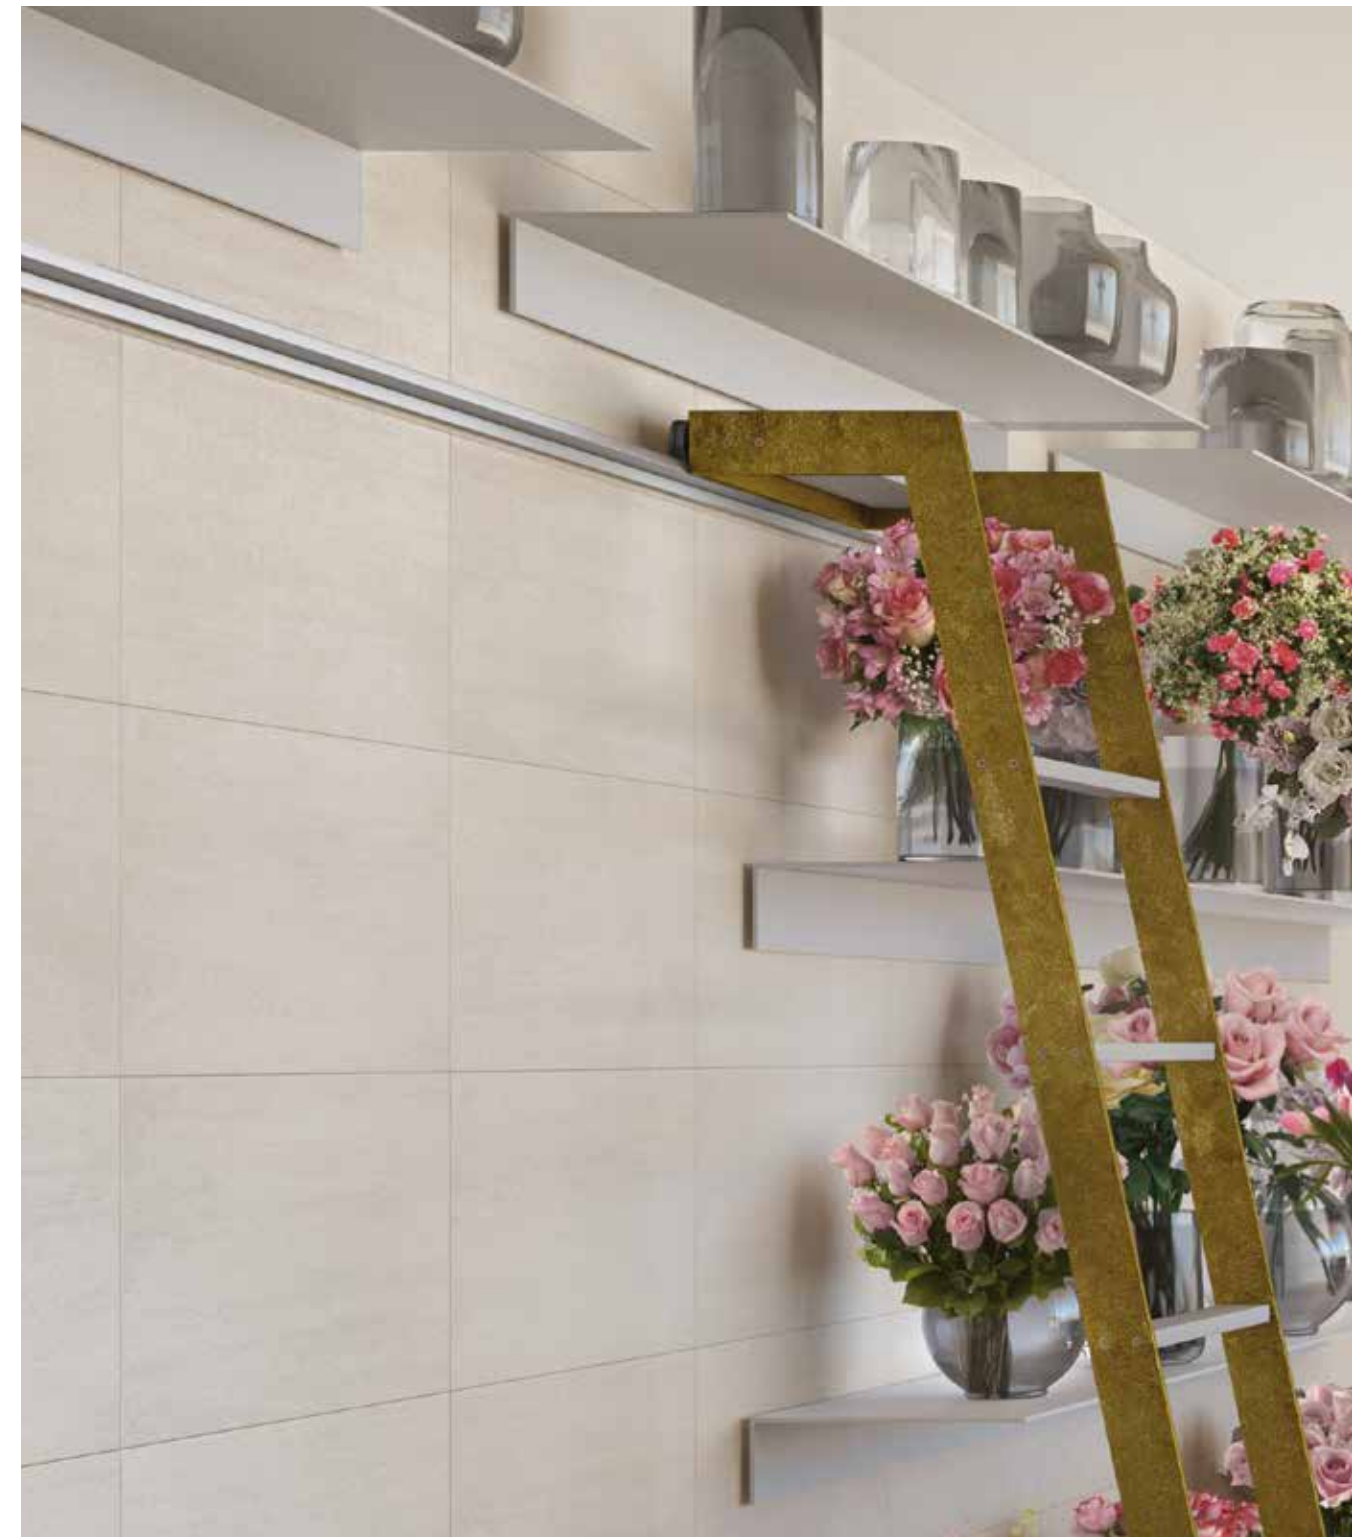

# PLASTER

V1 UNIFORM APPEARANCE

Compliant with standards ANSI A137.1-2012



NEW 2017

SIZE - THICKNESS | 12 3/8" x 22 1/2" - 31.5x57 cm ✂ 8.5 mm FINISH | MATTE



**PLASTER Pure**  
12 3/8" x 22 1/2" - 31.5x57 cm  
600010002020



**PLASTER Warm**  
12 3/8" x 22 1/2" - 31.5x57 cm  
600010002021



**PLASTER Ash**  
12 3/8" x 22 1/2" - 31.5x57 cm  
600010002022

## PLASTER

Plaster Ash 12 3/8" x 22 1/2" - 31.5x57 cm  
Plaster Ash Brick Wall Mosaic 12" x 12" - 30.5x30.5 cm

### MOSAICS & DECORS



**PLASTER Blue Scrape**  
12 3/8" x 22 1/2" - 31.5x57 cm  
600110000830



**PLASTER Brass Scrape**  
12 3/8" x 22 1/2" - 31.5x57 cm  
600110000831



**PLASTER Pure Brick Wall Mosaic**  
12" x 12" - 30.5x30.5 cm  
(Mosaic 1" x 3")  
600110000828






**PLASTER Warm Brick Wall Mosaic**  
12" x 12" - 30.5x30.5 cm  
(Mosaic 1" x 3")  
600110000829



**PLASTER Ash Brick Wall Mosaic**  
12" x 12" - 30.5x30.5 cm  
(Mosaic 1" x 3")  
600110000827

### COORDINATING TRIMS

	Wall Bullnose	Corner Line
PLASTER Pure	600140000016	600010001973
PLASTER Warm	600140000017	600010001974
PLASTER Ash	600140000015	600010001972

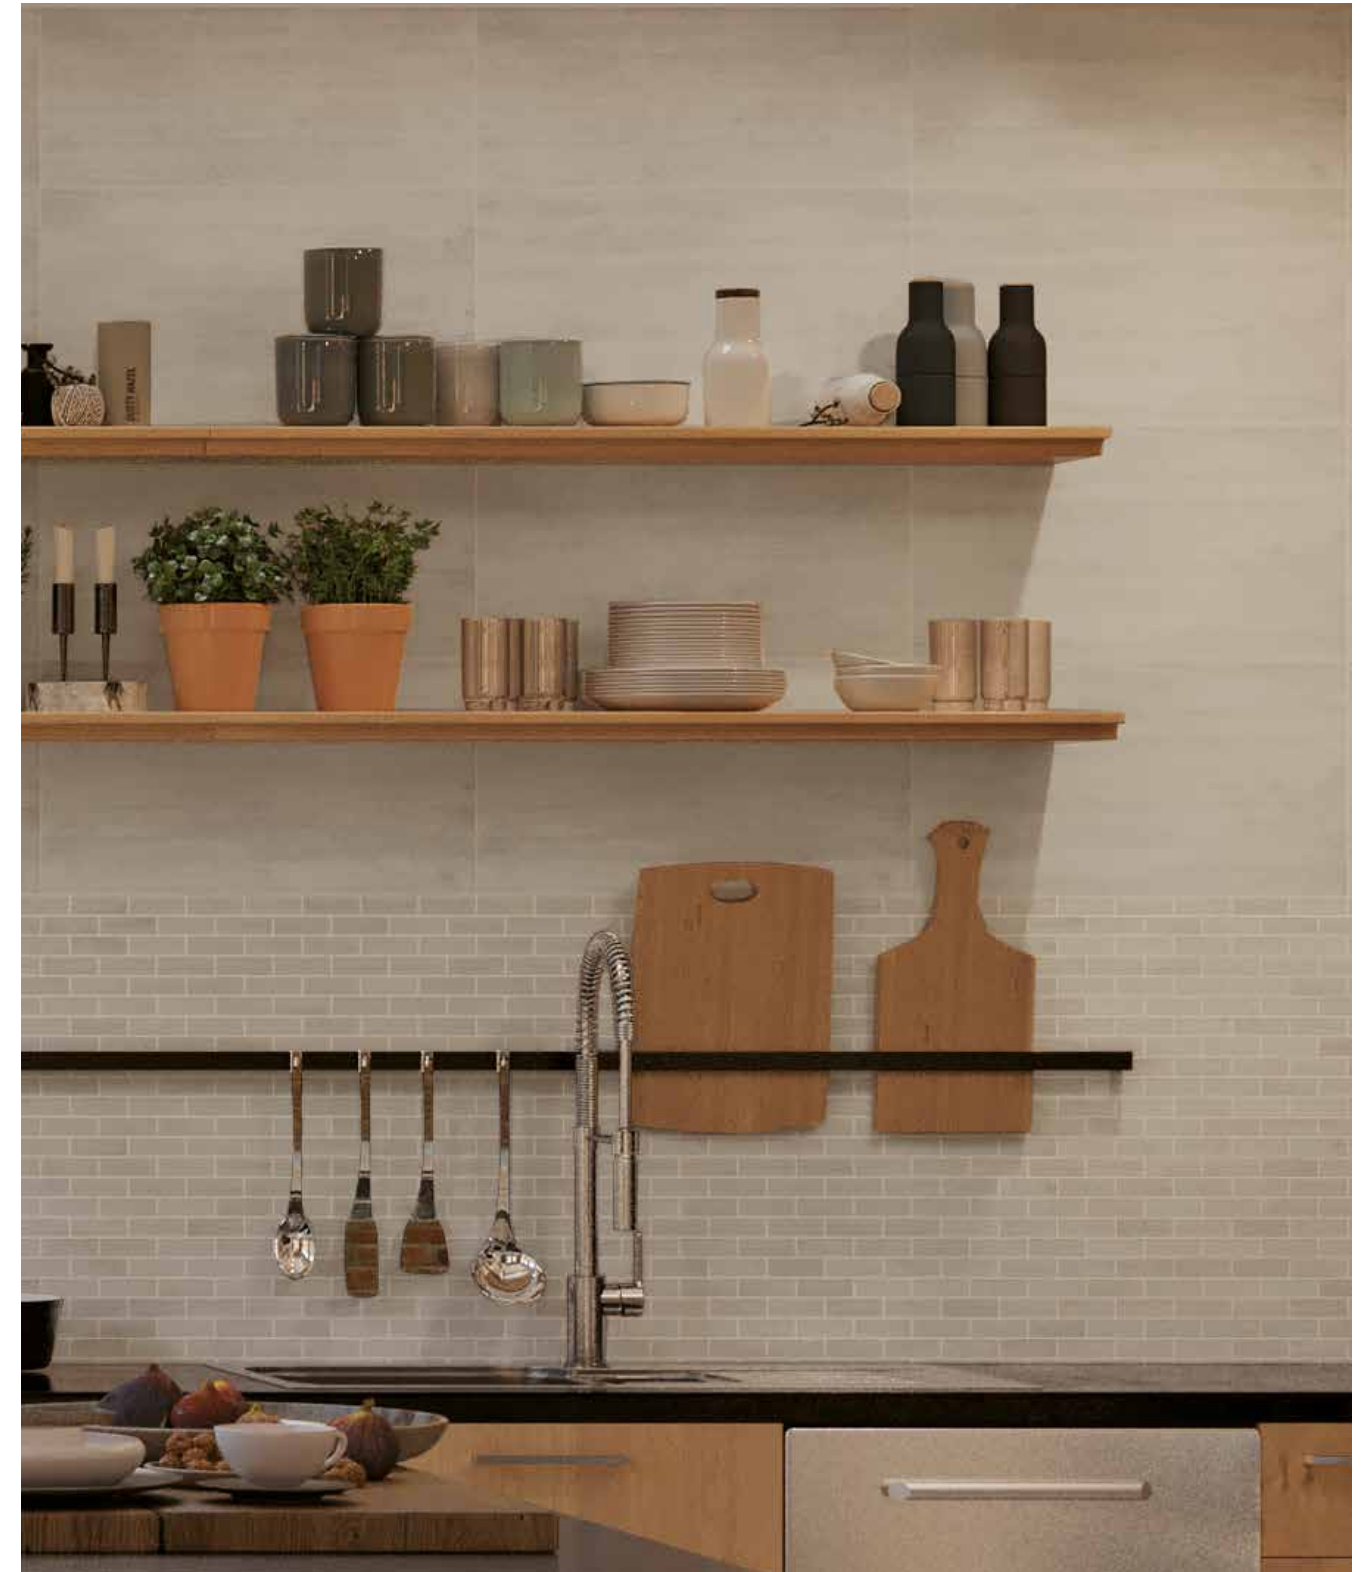



Compliant with standards ANSI A137.1-2012

SIZE - THICKNESS

12<sup>3/8</sup>"x22<sup>1/2</sup>" - 31.5x57 cm ± 8.5 mm

FINISH

MATTE



V1

UNIFORM APPEARANCE

Differences among pieces from the same production run are minimal.

FIELD TILES - Available in all colors

Commercial size (in)	Nominal size (in)	Thickness (mm)	Finish	Rectified edge
12"x22"	12 3/8" x 22 1/2"	8.5 mm	Matte	-

MOSAICS AND COORDINATING TRIMS - Available in all colors

Commercial size (in)	Nominal size (in)	Thickness (mm)	Finish
Mosaic 1"x3"	12" x 12"	8.5 mm	Matte
Wall Bullnose 2"x12"	2" x 12 3/8"	8.5 mm	Matte
Corner Line 1/2"x12"	1/2" x 12 3/8"	8.5 mm	Matte

Please refer to caliber chart for work sizes. Close joints are not recommended.

PERFORMANCE & FEATURES

PLASTER

PROPERTY	ASTM TEST METHOD	Porcelain Tile Specification				PLASTER	
		Calibrated		Rectified			
		Minimum	Maximum	Minimum	Maximum		
REGULARITY CHARACTERISTICS	Nominal Size	-2.00%	2.00%	-2.00%	2.00%	Compliant	
	Caliber Range (Variation from average facial dimension of sample)	-0.30% or -0.04 in (-1.0 mm) (*)	0.30% or 0.04 in (1.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant	
	Thickness (1)	N/A	Range: 0.031 in (0.79 mm)	N/A	Range: 0.031 in (0.79 mm)	Compliant	
	Wedging	ASTM C502	-0.40% or -0.05 in (-1.3 mm) (*)	0.40% or 0.05 in (-1.3 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant
	Warpage Edge	ASTM C485	-0.30% or -0.04 in (-1.0 mm) (*)	0.40% or 0.05 in (1.3 mm) (*)	-0.30% or -0.04 in (-1.0 mm) (*)	0.40% or 0.05 in (1.3 mm) (*)	Compliant
	Warpage Diagonal		-0.30% or -0.05 in (-1.3 mm) (*)	0.40% or 0.07 in (1.8 mm) (*)	-0.30% or -0.05 in (-1.3 mm) (*)	0.40% or 0.07 in (1.8 mm) (*)	Compliant
All Porcelain Tiles							
STRUCTURAL CHARACTERISTICS	Water Absorption	ASTM C373	≥ 10.0%			10% - 20%	
BULK MECHANICAL CHARACTERISTICS	Breaking Strength	ASTM C648	Average ≥ 125 lbf. (1.11 kN) Individual ≥ 100 lbf. (0.44 kN)			≥ 175 lbf. avg	
PHYSICAL PROPERTIES	Bond Strength	ASTM C482	≥ 50 psi (0.34 Mpa)			≥ 100 psi	
THERMAL AND IGROMETRIC CHARACTERISTICS	Crazing Resistance	ASTM C424	Pass			Resistant	
	Thermal Shock Resistance	ASTM C484	Pass			Resistant	
CHEMICAL CHARACTERISTICS	Chemical Resistance	ASTM C650	As Reported			Unaffected	
	Stain Resistance	ASTM C1378	As Reported			Unaffected	

(\*) Whichever is less  
(1) May not apply to textured surfaces or tiles with uneven back patterns.

The Health Product Declaration® logo is a registered trademark of HPD Collaborative.



Atlas Concorde reserves the right to modify any product without notice and will not be liable for any direct or indirect damage resulting from such modifications. Colors and optical features of the materials illustrated in this catalogue are to be regarded as mere indications. For information and details relating to codes, packaging and weight it is recommended to refer to the latest pricelist.

© Copyright Atlas Concorde USA, Inc. 2017  
The reproduction of the work, fully or in part, is strictly forbidden.